


Air & Water

PHWS03 MAXIMUS Grey

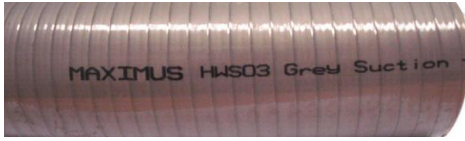

Applications: A general purpose hose for suction and delivery of waters, mud, acid, latex, grains and other materials. Can be used in agriculture and industry, placed on tank trucks, ships, silos and offers resistance to crushing, abrasion, attack from atmospheric agents and most chemicals.

Temperature: -10°C to +60°C
Cover: Grey, slightly corrugated PVC compound
Tube: Grey, PVC compound
Reinforcement: Anti-shock rigid PVC helix

Size	ID mm	OD mm	WP psi	BP psi	B Rad mm	Vacuum %	Weight Kg/mtr
25	25.4	32	90	270	80	90	0.37
32	32.1	39	90	270	100	90	0.51
38	38.1	46	75	225	150	90	0.67
45	44.5	52	75	225	175	90	0.83
51	50.8	60	75	225	200	90	1.02
63	63.5	75	65	195	250	90	1.44
76	76.1	87	65	195	300	90	2.22
102	101.6	115	55	165	375	90	3.03
127	127.0	142	45	135	550	90	4.15
152	152.4	170	40	120	625	90	6.45

PHWS17 Antismell



Applications: For the transfer of sewerage on marine craft.

Temperature: -10°C to +60°C
Cover: White, slightly corrugated plasticised PVC
Tube: White, plasticised PVC
Reinforcement: Anti-shock rigid PVC helix

Size	ID mm	OD mm	WP psi	BP psi	B Rad mm	Vacuum %	Weight Kg/mtr
19	19.1	25	100	300	80	70	0.24
25	25.4	32	100	300	100	80	0.43
38	38.1	45	75	225	160	70	0.62